




396 Attwell Drive, Toronto, Ontario. M9W 5C4  
 TEL: (416)742-7642 FAX: (416)742-9438 order@dcm-metal.com

## Product Data Sheet Carrying Channel

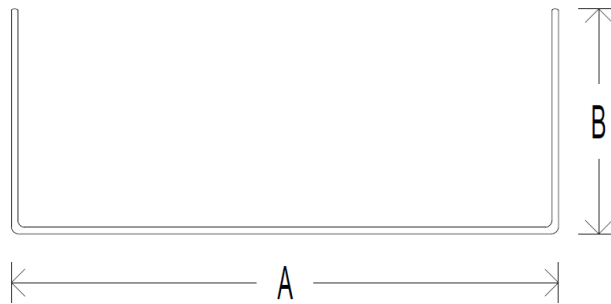

A = Section Depth	B = Leg	Thickness
1.500"	0.500"	0.043"
1.500"	0.500"	0.054"
0.750"	0.500"	0.054"
1.500"	0.750"	0.054"

- Carrying Channel is used to prevent stud rotation under wind loads
- All curtain wall assemblies must have 1 row of bridging at 5 feet on centre or less
- Bridging clips must be fastened at every location where a carrying channel meets a stud for curtain wall assemblies
- Available in standard 12' lengths

Manufactured in accordance to: CAN/CSA S-136-16 (North American specification for the design of cold-formed steel structural members), ASTM A653/A653M (Standard for steel sheet, zinc-coated (galvanized) or zinc-iron alloy-coated by the hot-dip process), ASTM C645 (Standard specification for non-structural steel framing members).