




396 Attwell Drive, Toronto, Ontario. M9W 5C4
 TEL: (416)742-7642 FAX: (416)742-9438 order@dcm-metal.com

Product Data Sheet Non-Loadbearing Steel Stud

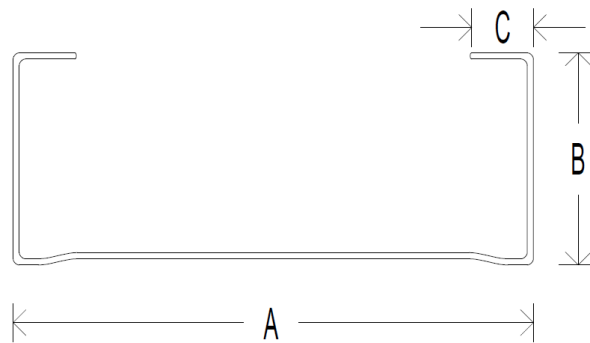

Product Code	A = Section Depth	B = Flange	C = Lip
162S125-18	1.625"	1.250"	0.250"
250S125-18	2.500"	1.250"	0.250"
362S125-18	3.625"	1.250"	0.250"
600S125-18	6.000"	1.250"	0.250"

- Non-Loadbearing (18 mils) steel studs are available in 1-5/8", 2-1/2", 3-5/8", and 6" web sizes in a variety of standard stock lengths
- Custom lengths are available on request and manufactured to industry tolerances
- Pre-punched knockouts at 24" on centre
- 1-1/4" flanges
- G-40 minimum zinc coating (G-90 available on request)

Manufactured in accordance to: CAN/CSA S-136-16 (North American specification for the design of cold-formed steel structural members), ASTM A653/A653M (Standard for steel sheet, zinc-coated (galvanized) or zinc-iron alloy-coated by the hot-dip process), ASTM C645 (Standard specification for non-structural steel framing members), and Standard CSSBI 61-18 (Manufacturer Certification Requirements for Cold Formed Steel Framing Members - Certificate of Registration reference number Q107858).

