


DCM METAL CORP

BRIDGING CLIPS

DATA SHEET

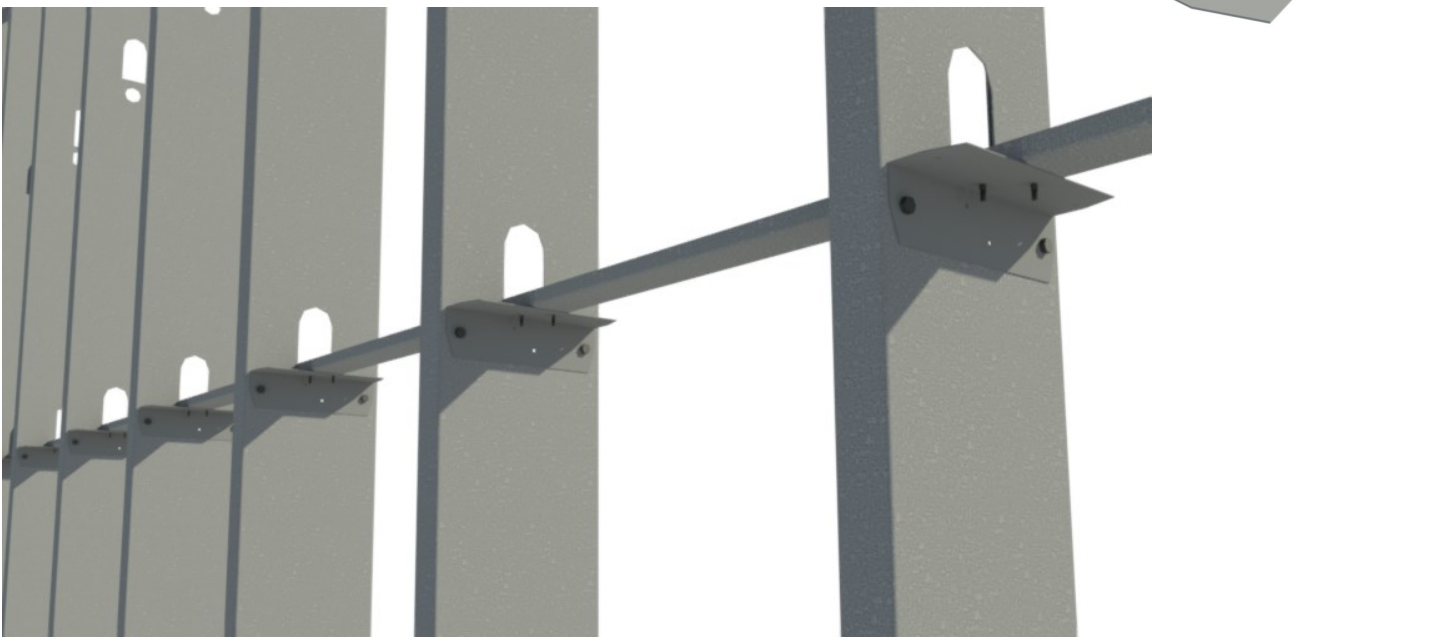

DCM METAL CORP

396 Attwell Drive
Toronto, Ontario
M9W 5C3

Phone: 416-742-7642
Fax: 416-742-9438
www.dcm-metal.com

Bridging Clips are used for the installation of bridging channel for both wind load and combined wind and axial load bearing applications at every location where a carrying channel meets a steel stud. Four fasteners (#8 or #10) per clip are used in pre-punched (0.160") holes. The clips can be used on the inside or outside of stud. Bridging Clips can also be used with headers, sills, window and door openings.

Packaging:

1-1/2" x 1-1/2" angle available in 3-1/4", 5-1/2" and 7-1/2" lengths @ 100pcs/bag

Material:

0.054" thickness, 50ksi tensile strength, G-60 minimum galvanized

Standards:

ASTM A1003: Specification for Steel Sheet, Carbon, Metallic and Nonmetallic-Coated for Cold-Formed Framing Members.

ASTM A653: Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.