
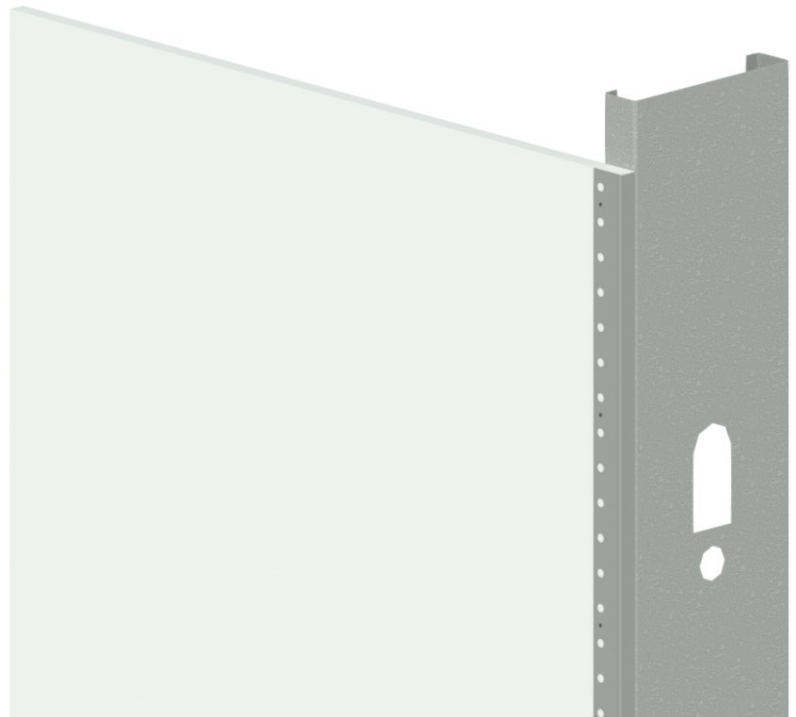


DCM METAL CORP

L TRIM

DATA SHEET

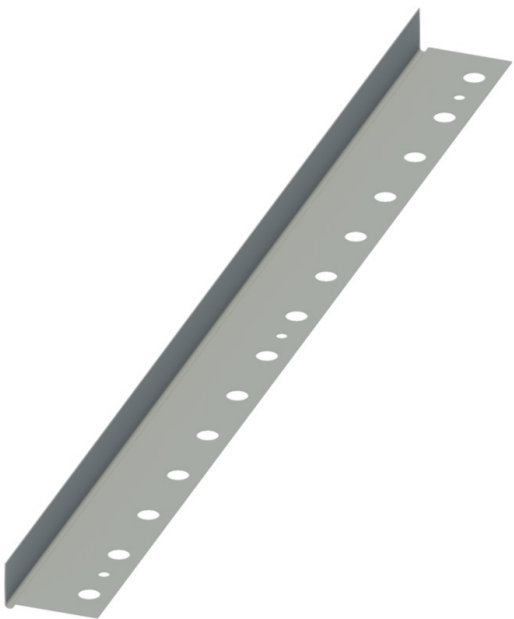

DCM METAL CORP

396 Attwell Drive
Toronto, Ontario
M9W 5C3

Phone: 416-742-7642
Fax: 416-742-9438
www.dcm-metal.com

Metal L Trim provides a clean finished edge at window and door openings and where wallboard abuts dissimilar surfaces such as suspended ceilings, beams, plaster, masonry and concrete. L Trim is installed after the gypsum board is already in place, unlike mudable J Trim, which must be installed during gypsum panel installation. L Trim can be applied with nails or screws and the front edge is hemmed for safety and rigidity. The 'key' holes and knurled surface allow for superior joint compound adhesion. L Trim is available for use with 1/2" and 5/8" wallboard, and in 8' and 10' lengths, and packaged at 25pcs/ctn.

Standards:

Manufactured in compliance with ASTM C1047 (Standard for metal trims), ASTM C754 (installation standard), ASTM A1003 (steel grade) and ASTM A653 (zinc/galvanized coatings).