


DCM METAL CORP


HDG - BRT SURFACE MOUNTED BRICK CONNECTOR

DATA SHEET

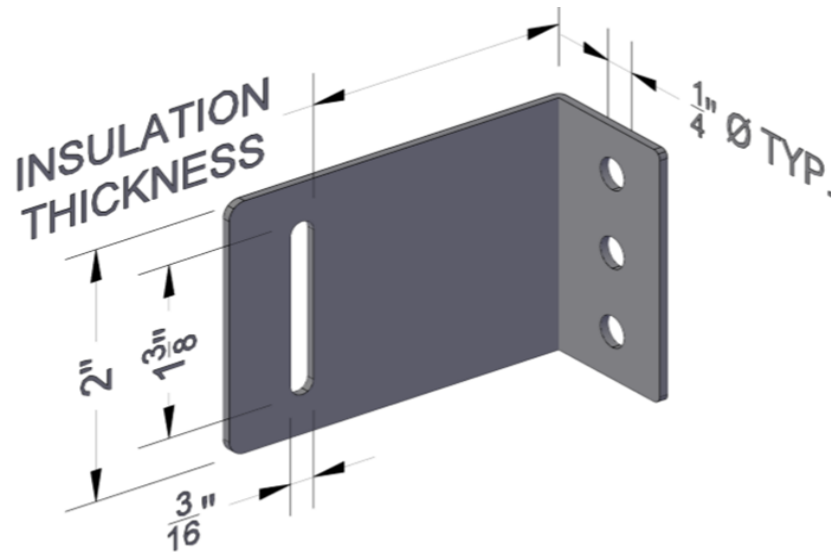

HDG-BRT surface mounted post galvanized brick connectors are fastened to steel stud flanges and are available in different lengths to accommodate various insulation board thicknesses (from no insulation up to 4" insulation). The HDG-BRT connectors and 3" galvanized wire ties are used together to provide a high strength connection to the mortar and brick cladding, while allowing for the engineered specified allowable deflection limit to the exterior steel stud assembly (3" wire ties are sold separately).


Product Name	Sheathing/Insulation Thickness	Pieces Per Bag
HDG-BRT00	0"	200
HDG-BRT10	1"	125
HDG-BRT20	2"	125
HDG-BRT30	3"	125
HDG-BRT40	4"	125

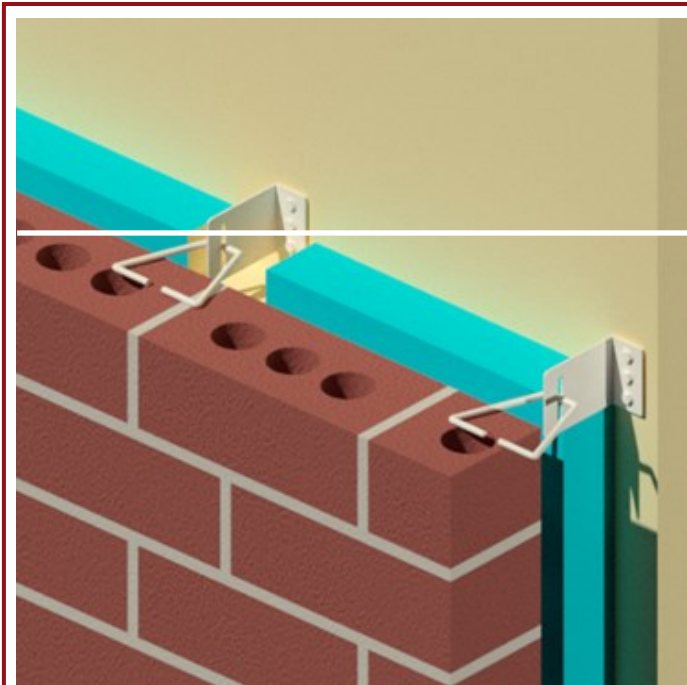

HDG-BRT

Surface Mounted Brick Connector

Fastened to steel stud flanges with 3" wire ties to provide a high strength connection to mortar and brick cladding

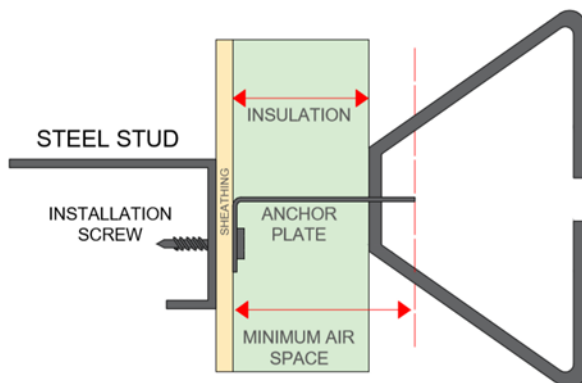

Material:

G-90 min galvanized, 0.054" thickness, 50 ksi tensile strength

Reference Standards:

CSA A370-14 – Connectors for Masonry galvanizing standards

ASTM A153 – Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

CSA G30.3 – Cold-Drawn Steel Wire for Concrete Reinforcement

ASTM A1008 – Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable



DCM METAL CORP

396 Attwell Drive
Toronto, Ontario
M9W 5C3

Phone: 416-742-7642
Fax: 416-742-9438
www.dcm-metal.com