


SLOTTED DEEP TRACK

DATA SHEET

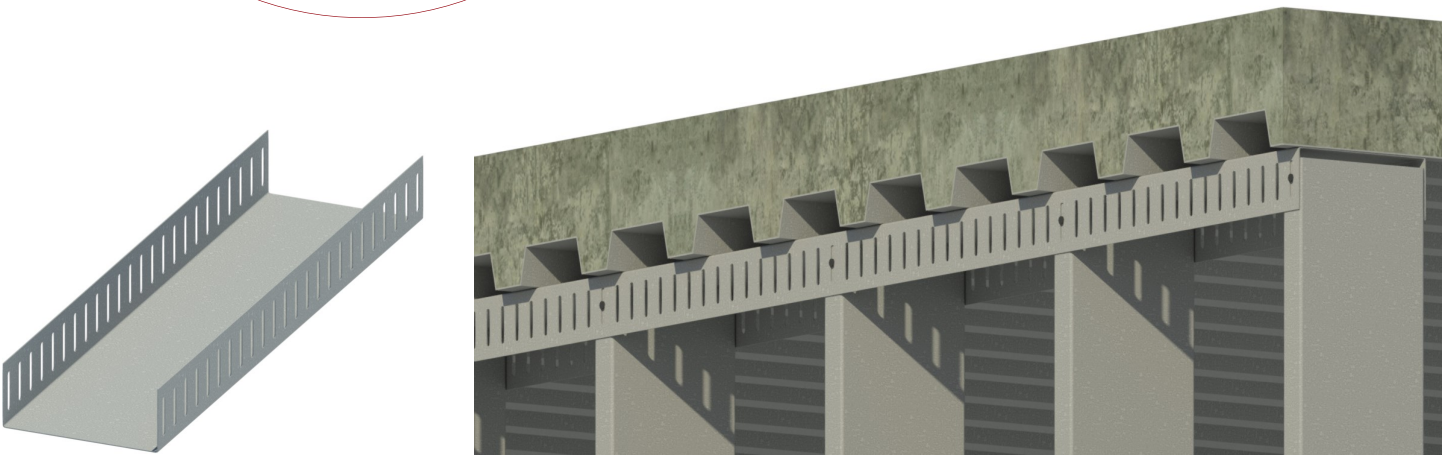

Slotted Track is used for superior head-of-wall vertical deflection, allowing the top of the wall stud to float within the track legs. This connection allows for vertical live load movement of the primary structure without transferring axial loads to the wall studs. The 2-1/2" Legs have 1-1/2" long slots with a total allowable vertical (deflection) movement of 1-1/2" (3/4"±). The pre-punched pilot holes make this system easy to install, and this one-piece system reduces the cost of materials and labour. Slotted Track can be used for both interior non-load bearing walls and exterior curtain wall systems. All Slotted Track is colour coded for easy identification.

Material:

Available in 2-1/2", 3-5/8", 4", 6" and 8" web sizes.

3-5/8", 4", 6" and 8" Slotted Track is available in 33 mils - 68 mils.

2-1/2" Slotted Track is available in 18 mils and 33 mils; 3-5/8" and 6" slotted deep tracks are available in 18 mils.

Available in standard 10' lengths.

Tensile Strength: 18 mils, 33 mils, and 43 mils are produced with 33ksi tensile strength steel; 54 mils, and 68 mils are produced with 50ksi tensile strength steel.

Zinc coating: G-40 minimum (18 mils), G-60 minimum for 33 - 68 mils.

Manufactured in accordance with CAN/CSA S-136-16 (North American specification for the design of cold-formed steel structural members), ASTM A653/A653M (Standard for steel sheet, zinc-coated (galvanized) or zinc-iron alloy-coated by the hot-dip process), ASTM C645 (Standard specification for non-structural steel framing members).



DCM METAL CORP

396 Attwell Drive
Toronto, Ontario
M9W 5C3

Phone: 416-742-7642
Fax: 416-742-9438
www.dcm-metal.com